


MLL RANGE

LED SURFACE, SUSPENDED OR RECESSED LOW GLARE LINEAR

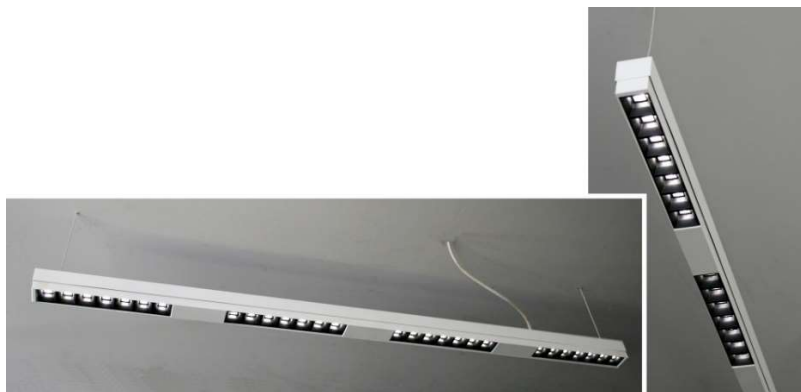

The MLL is a discrete linear luminaire with low glare optics and baffles. The ultra-slim body along with the low glare optics makes this ideal where a low UGR is required.

The MLL comes in 1,200mm and 1,500mm lengths and can be suspended, surface mounted or recessed. The Ledil optics and baffles gives the option of 2 baffle colours (black or white) and a choice of 3 beam angles (50°, 80° and single asymmetric).

The body come supplied as white as standard although it can be finished in other RAL colours on request - note the top and bottom section can be finished in separate colours if required.

Emergency versions are supplied with an integral inverter which powers the LED boards.

| LUMINAIRE CAT NO. | NOMINAL SIZE MM | LUMEN OUTPUT* | POWER (tcW) | WEIGH KGS | DIM | EM |
|-------------------|-----------------|---------------|-------------|-----------|-----|----|
| MLL401 | 1,200 | 1,883 | 12.9 | 1.4 | • | • |
| MLL401(HO) | 1,200 | 3,612 | 26.8 | 1.4 | • | • |
| MLL501 | 1,500 | 2,511 | 17.2 | 1.9 | • | • |
| MLL501(HO) | 1,500 | 4,816 | 35.8 | 1.9 | • | • |

*The lumen output of the luminaire based on 4,000K LED diodes with 80° optics

ADDITIONAL ORDERING INFORMATION

- DALI Emergency - add /DALI
- Emergency version - add /EM
- Plasterboard ceilings - add /PB
- Recessed with trim - add /REC
- Surface Mounted - add /SUR
- Wire Suspension - add /DSW
- 50° Beam Angle - add /MD
- 80° Beam Angle - add /WD
- Asymmetric Beam - add /ASY

- Baffle Colours;
- Black - as standard
 - White - add /WB

- Body Colours:
- White - as standard
 - Black - add /B
 - Other RAL colours - on request

LED Colours;

- Warm white (3,000k)- add /CLWW
- Cool white (4,000k) - add /CLCW
- Tuneable white - on request

FEATURES

- Low glare discrete fitting
- Choice of 3 optic beam angles – 50°, 80° and single asymmetric
- Choice of black or white baffle colours.
- Integral emergency.
- SELV
- DALI Dimming available
- CRI >80, CRI >90 also available
- 3,000k or 4,000k colour option – tuneable white available on request.
- Surface, suspended or recessed.
- White body as standard – other colours available on request.
- Up to 146 LLm/tcW
- Modular construction allows for end-of-life upgrade of boards and control gear

DIMENSIONS

