

## PWP RANGE

### IP66 POWER WALL PACK WITH FULL CUTOFF



#### FEATURES

- IP66 rated
- Full cut off for dark sky
- Black powder coated die cast aluminium base as standard
- Polycarbonate lens optics
- Photocell or microwave attachments available
- Trim plate available for retrofit option to cover surface blemishes
- Mounting heights of 4-8m possible
- Up to 112 Llm/tcW

The PWP has been designed as a sealed IP66, wall mounted light with a full cut off to prevent any up spill of light from the luminaire.

The fitting is supplied with a powder coated die cast aluminium body with a moulded polycarbonate lens designed to spread light outwards and to the sides giving great uniformity over a large area allowing for a reduction in the number of fittings compared to a standard bulkhead type fitting. The fitting can come with integral photocell or microwave sensors for additional control.


Where this fitting is being used to retrofit an existing installation, a trim plate is available to cover up any surface blemishes from the original fittings.

Emergency versions are supplied with an integral inverter that powers the LED board.

LUMINAIRE CAT NO.	NOMINAL SIZE MM	POWER (tcW)	LUMEN OUTPUT*	WEIGHT KGS	DIM OPTION	EM OPTION
PWP120	220x280	19.4	2,140	5.4	•	•
PWP130	220x280	28.4	3,151	5.4	•	•
PWP140	220x280	41.8	4,459	5.4	•	•

\*The lumen output of the luminaire – based on 4,000k colour LEDs.

#### DIMENSIONS

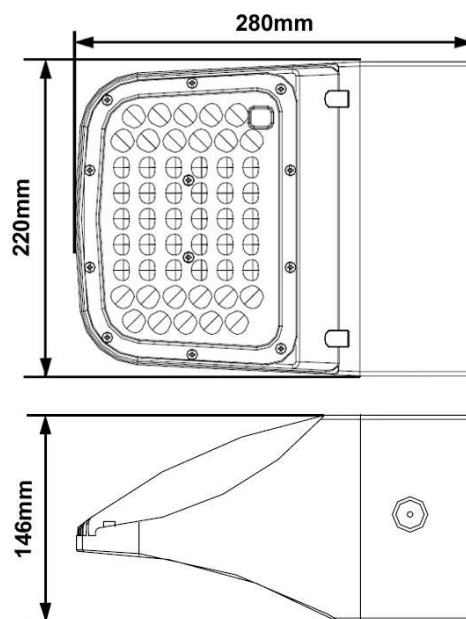

#### ADDITIONAL ORDERING INFORMATION

- 1-10v dimming - add /1-10
- Photocell - add /PC
- Microwave sensor - add /MW
- Trim plate - add /TP
- Emergency Version - add /EM

Body Colours:

- Black as Standard

LED COLOURS

- Warm white 3,000k - add /CLWW
- Cool white 4,000k - add /CLCW
- Very cool white 5,000k - add /CLVCW