


RLG171 & 175 RANGE

ADJUSTABLE RECESSED SLIMLINE LINEAR DOWNLIGHT

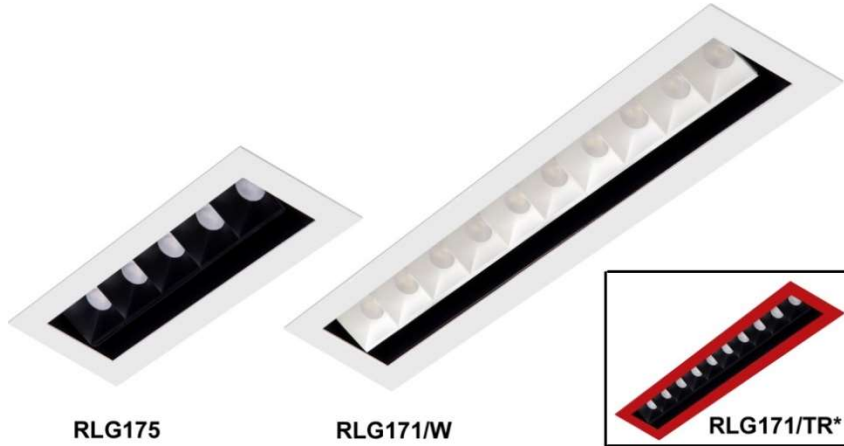

RLG175

RLG171/W

RLG171/TR*

To complement our RLD161 & 165 fixed linear downlight range, we have our adjustable RLG171 & 175 range. The range keeps the same slim line appearance but adds in the flexibility of being able to rotate the line of LEDs by up to 25° in either direction from the vertical plane. A 30° beam angle is standard but for a more focused light, a 10° or 15° beam angle is also available. Alternatively, for a wide flood of light a 50° beam angle is available. The fitting comes as standard with black, white or gold baffles and either a black, white or gold bezel. Alternative colours for the baffle and trim are available on a longer lead time.

The fitting comes with Ra80 diodes as standard, although Ra90 diodes are also available, in either 3,000k (warm white) or 4,000k (cool white).

Integral emergency versions are available, with the further option of DALI addressable emergency kit.

LUMINAIRE CAT NO.	NOMINAL SIZE MM	POWER (tcW)	LUMEN OUTPUT*	EFFICACY Llm/tcW	WEIGHT KG	DIM OPT	EM OPT
RLG175(HE)	195X80	7	525	75.0	0.7	•	•
RLG175	195X80	13	1,050	80.7	0.7	•	•
RLG171(HE)	349X80	13	1,050	80.7	1.2	•	•
RLG171	349X80	23	2,100	91.3	1.2	•	•

*Lumen output of the luminaire, based on a 4000k LED diodes and a 25° ambient temperature

ADDITIONAL ORDERING INFORMATION

- Switch dimming - add /SD
- DALI dimming - add /DALI
- DSI Dimming - add /DSI
- 10° Beam Angle - add /SP
- 15° Beam Angle - add /NW
- 50° Beam Angle - add /FD
- Emergency version - add /EM
- DALI emergency - add /EMD

LED Colours:

- Warm White (3,000K) - add /CLWW
- Cool White (4,000K) - add /CLCW

Baffle Colours:

- Black - as standard
- White - add /W
- Gold - add /GD
- Other colours available on request †

Trim Colours:

- White - as standard
- Black - add /TB
- Grey (RAL9006) - add /GY
- Other colours available on request †

† Denotes longer lead time

FEATURES

- Up to 25° rotation from the vertical plane in either direction
- Long lifetime of 60,000 hrs
- L80 F50
- Ra90 as standard
- Switch, DALI, & DSI dimming options
- 80mm void depth
- Integral emergency versions available
- Standard 30° beam angle – 10°, 15° and 50° beam angle also available
- Up to 94.2 Llm/tcW
- Alternative trim and baffle colours available on request

DIMENSIONS

