

SLC250, 251 & 252 RANGES


SURFACE / SUSPENDED LED DOWNLIGHT



FEATURES

- Incorporates Tridonic light engine
- Die cast body with a choice of colours
- 55,000 Hours - L80 B10
- Exceptional colour consistency
- CRI 80 as standard
- DALI or DSI dimming options
- 40° reflector as standard, wide and narrow beam reflectors also available
- Choice of body colours
- Range of accessories available
- Up to 130 Llm/tcW

DIMENSIONS

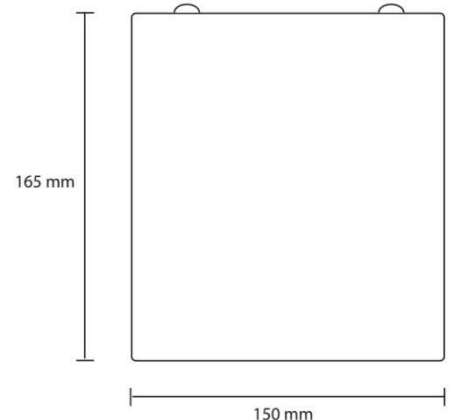

The SLC range is a surface/suspended version of our RLD650, 651 & 652 ranges. The SLC252 range comes as standard with a 40° reflector, with a choice of a narrow (25°) or wide (60°) beam reflector. The SLC250 has a 40° specular reflector whilst the SLC251 has a 50° satin reflector.

The range has been designed to incorporate the latest Tridonic light engine and coupled with the reflectors produces a luminaire efficiency of up to 130 Llm/tcW. Optimised passive thermodynamics ensure efficiency and long in-service life of 55,000 hours (L80).

LUMINAIRE CAT NO	POWER (tcW)	COLOUR TEMP(K)	LUMEN OUTPUT*	EFFICACY LIM/tcW	DIM OPT	EM OPT
RLD650-651-652/070/30	8	3000	1,010	126.1	•	-
RLD650-651-652/070/40	8	4000	1,044	130.3	•	-
RLD650-651-652/110/30	13.8	3000	1,705	123.9	•	-
RLD650-651-652/110/40	13.8	4000	1,766	128.3	•	-
RLD650-651-652/200/30	19.1	3000	2,307	120.8	•	-
RLD650-651-652/200/40	19.1	4000	2,385	124.9	•	-

*Lumen output of the SLC252 based on a 25°C ambient temperature (operating temperature: -20°C to 35°C)

ADDITIONAL ORDERING INFORMATION

- | | | |
|-------------------------------|-------------|------------------|
| • Mains dimming | - add /MDIM | Body Colours: |
| • DALI dimming | - add /DALI | • White - add /W |
| • DSI dimming | - add /DSI | • Grey - add /G |
| • 25° Reflector (SLC252 only) | - add /NW | • Black - add /B |
| • 60° Reflector (SLC252 only) | - add /WD | |
| • Wire suspended | - add /DSW | |