

SLH RANGE

SUSPENDED LED HIGH BAY PENDANT



The SLH range has been introduced as an LED alternative to our SHP range.

This LED range has been built to incorporate the Philips DLM light engine and coupled with the high efficiency clear PMMA refractor it achieves a high DLOR of 92.5%. Thermal derating ensures efficiency and long life of 60,000 hours (L70), operating temperature - 25°C to +35°C.

The SLH comes with a 2m suspension kit as standard with a white body. Black and grey body options are also available.


| LUMINAIRE CAT NO | POWER (tcW) | COLOUR TEMP(K) | LUMEN OUTPUT* | EFFICACY LLM/tcW | WEIGHT KG | DIM & or EM |
|---------------------|----------------|-------------------|------------------|---------------------|--------------|----------------|
| SLH110/3000 | 9.9 | 3,000 | 1,014 | 102.9 | 2.8 | • |
| SLH110/4000 | 9.9 | 4,000 | 1,095 | 111.1 | 2.8 | • |
| SLH200/3000 | 19.5 | 3,000 | 1,925 | 98.5 | 2.8 | • |
| SLH200/4000 | 19.5 | 4,000 | 2,085 | 106.7 | 2.8 | • |
| SLH300/3000 | 30.2 | 3,000 | 2,694 | 89.1 | 2.8 | • |
| SLH300/4000 | 30.3 | 4,000 | 2,922 | 96.3 | 2.8 | • |
| SLH500/3000 | 46.4 | 3,000 | 4,188 | 90.3 | 2.8 | • |
| SLH500/4000 | 46.4 | 4,000 | 4,543 | 98.0 | 2.8 | • |

*Lumen output of the luminaire based on a 25°C ambient temperature (operating temperature: -20°C to 35°C)

FEATURES

- Incorporates Philips DLM light engine
- Clear PMMA Refractor
- Low UGR
- 60,000 Hours - L70 B10
- CRI 80
- DALI compatible
- Touch dimming option
- Conical lens accessory
- 2M Suspension kit as standard (5m option available)
- Emergency versions available (not SLH500)
- Up to 111 Llm/tcW

DIMENSIONS

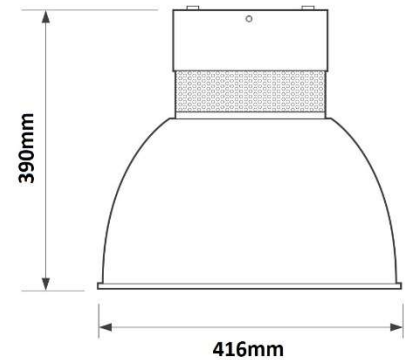

ADDITIONAL ORDERING INFORMATION

- MAINS dimming - add /MDIM
- TOUCH/DALI dimming - add /DALI
- 5m suspension kit - add /5M
- EM version (not SLH500) - add /EM
- White body - as standard
- Black Body - add /B
- Grey Body - add /G

LED Colours:

- Warm white (3,000k)
- Cool white (4,000k)