

WAL RANGE

WALL ACCENT LIGHT



FEATURES

- IP67 rated
- Black powder coated die cast aluminium base as standard
- Emergency Integral LED version (WAL20 & WAL60 only)
- Photocell option available
- Yoke bracket available for all models
Column adapter and 2 piece swivel bracket available for WAL60 & 80

DIMENSIONS

The WAL has been designed as a sealed IP67, wall mounted accent light. The fitting can be supplied with a yoke bracket for installations where flexible aiming is required.

The body is supplied with a powder coated die cast aluminium body with a tempered, clear glass lens. It also incorporates a built-in level for ease of installation. An integral photocell can be specified to make additional daylight savings.

Emergency versions are supplied with an integral inverter that powers the LED board.

LUMINAIRE CAT NO.	NOMINAL SIZE MM	POWER (tcW)	LUMEN OUTPUT*	WEIGHT KGS	DIM OPTION	EM OPTION
WAL20	200x168	21.1	2,300	3.5	•	•
WAL40	200x168	42.7	4,025	3.5	•	-
WAL60	286x248	56.2	6,508	5.5	•	•
WAL80	286x248	80.2	8,212	5.5	•	-


*The lumen output of the luminaire – based on 4,100k colour LEDs.

ADDITIONAL ORDERING INFORMATION


- Emergency version - add /EM
 - Photocell - add /PC
 - Yoke Bracket - add /YB
 - Column mounting adapter - add /SF (WAL60&80 only)
 - 2-piece swivel bracket - add /SB (WAL60&80 only)
- Body Colours:
• Black as Standard

LED COLOURS

- Cool white 4,100k - as standard

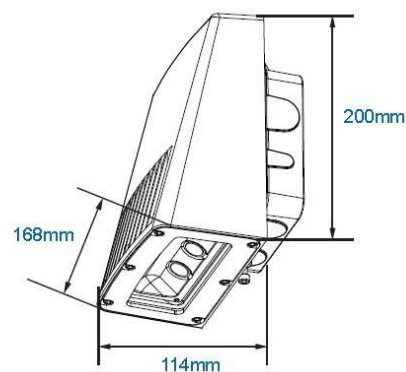

WAL20 & WAL 40

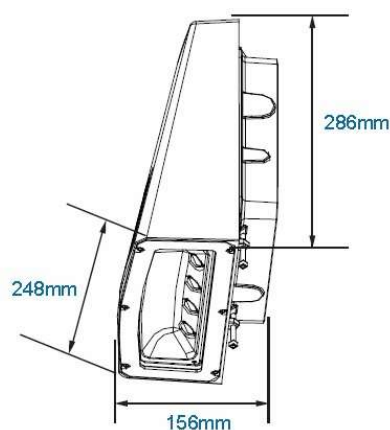

WAL60 & WAL80