

WMT RANGE

IP66 WALL MOUNTED UP/DOWN LIGHT



WMT120



WMT220

The WMT is an IP66 rated outdoor wall mounted up/down light. The fitting can be supplied as just an up or down light, or both up and down light.

The body is extruded aluminium with built in heat sinks, powder coated in RAL9005 (black) with a choice of 3 lens optics – a narrow 30° beam, medium 70° beam and wide 100° beam. The body can be mounted over a BESA box or a 100mm back box. For added energy savings the WMT can be fitted with a button photocell.

The fitting is supplied with 4,100k colour temperature LED diodes as standard.

LUMINAIRE CAT NO.	NOMINAL SIZE MM	LUMEN OUTPUT*	POWER WATTS	WEIGHT KG	EM OPTION
WMT120	226 X 260	2,197	21.0	8.5	•
WMT220	226 X 316	2,197/2,197	41.0	10.0	•

*Lumen output of the luminaire based on medium beam optics

ADDITIONAL ORDERING INFORMATION

- Narrow 30° beam - add /NW
- Medium 70° beam - add /MD
- Wide 100° beam - add /WD
- Photocell - add /PC
- Emergency option - add /EM


LED colours

- 4,100k (cool white) – as standard


FEATURES

- Architectural up / down light
- IP66 rated
- Efficacy > 105 lm/W
- 50,000 hour life
- Choice of 3 beam angle optics
- Emergency option

DIMENSIONS

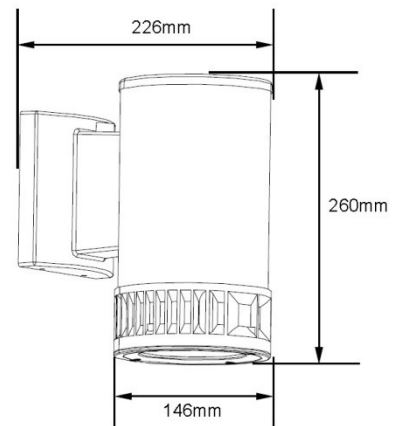

WMT120

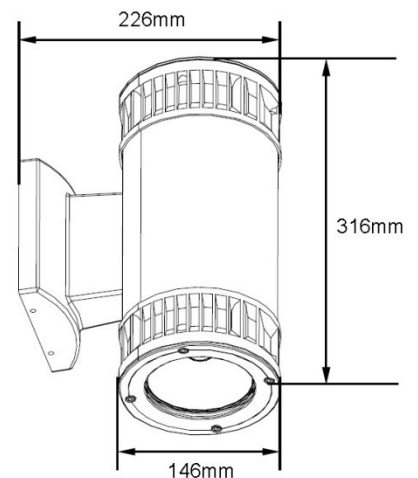

WMT220